


GHS 135 x 3 x 2470 C

Drawing No


:43135324703

Reference No


:04-001

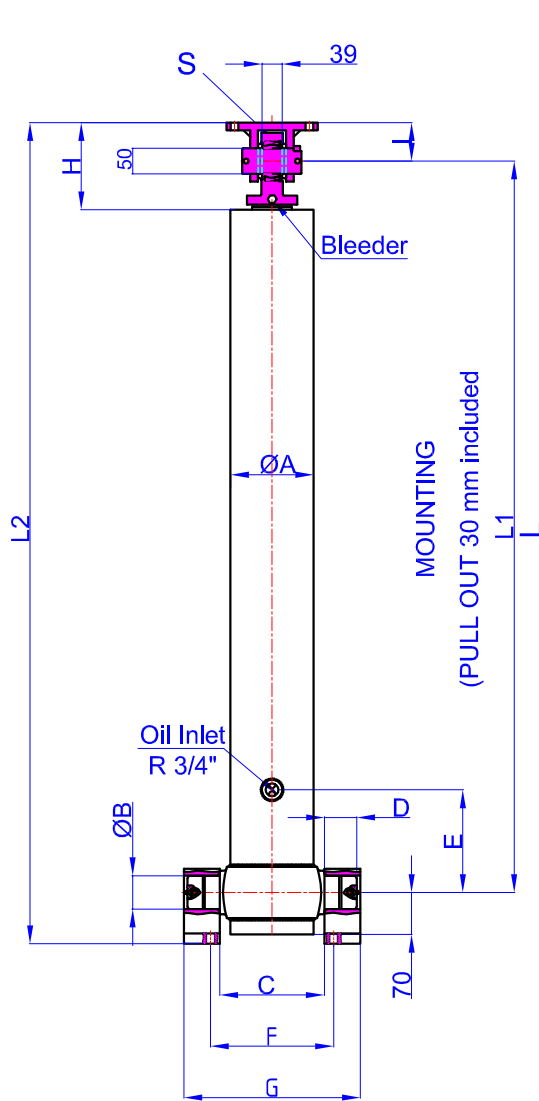

47000020-02-001
(Bracket Kits Top Clevis
GHTC GE 50x75)



47000057-0001
(Bracket Kits T
60-100-150-22)



A	:	156	mm
B	:	60	mm
C	:	193	mm
D	:	60	mm
E	:	200	mm
F	:	240	mm
G	:	333	mm
H	:	170	mm
I	:	75	mm
L	:	1068	mm
*L1	:	1098	mm
L2	:	1243	mm
S	:	42	mm

* Inc 30 mm pull out :
tolerance +20 -0


Hard Chromed all stages

Working Pressure : 135 Bar

Max. Working Pressure : 150- Bar

All Cylinder Materials are St 52 Cold Drawn Tubes

Tipping Weight = Weight Body + Payload



STAGE	1	2	3	4	5	6	7	8	TOTAL
EFFECTIVE DIAMETER (mm)	Ø135	Ø116	Ø98						
STROKE	823	823	824						2470
OIL DISPLACEMENT (L)	12,5	9,5	7						34,5
135 BAR (TONS)	24								

BL (body length)
Ro (rear overhang)
Ycog (vert. pos.
centre of gravity)
PI(Pivot length)
 $\alpha^\circ = \frac{st \times 60}{PI}$

	3000			2900			2800		
BL	200	400	600	200	400	600	200	400	600
Ro	46	50	54	48	52	56	50	54	59
Ycog									
400	24	29	38	25	30	42	26	32	46
700	29	39	49	30	40	52	33	42	53
1000	37	44	51	38	46	52	39	46	53
st	2300	2333	2340	2320	2340	2333	2333	2340	2360

Weight : --- Kg