




GHS 175 x 4 x 5500 C

Product Code :43175455003
Reference No : 04-001

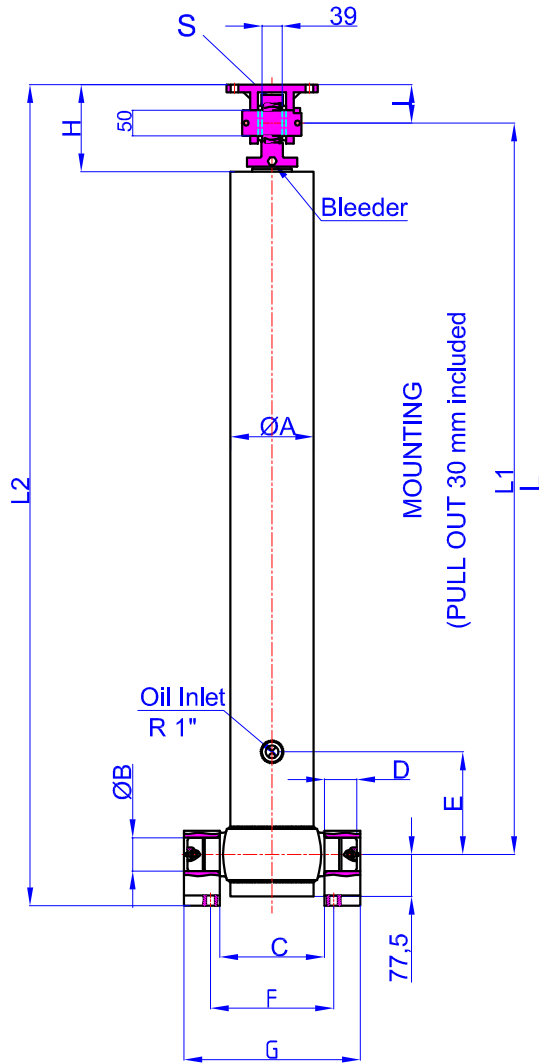

BRACKET KIDS
 60-125-220-50
 47000059-0001



A	:	197	mm
B	:	60	mm
C	:	240	mm
D	:	60	mm
E	:	200	mm
F	:	343	mm
G	:	380	mm
H	:	180	mm
I	:	85	mm
L	:	1680	mm
*L1	:	1710	mm
L2	:	1890	mm
S	:	42	mm

* Inc 30 mm pull out :
 tolerance +20 -0


Hard Chromed all stages

Working Pressure : 135 Bar

Max. Working Pressure : 150- Bar

All Cylinder Materials are St 52 Cold Drawn Tubes

Tipping Weight = Weight Body + Payload



STAGE	1	2	3	4	5	6	7	8	TOTAL
EFFECTIVE DIAMETER (mm)	Ø175	Ø154,5	Ø135	Ø116					
STROKE	1375	1375	1375	1375					5500
OIL DISPLACEMENT (L)	35	27,5	21	16					113
135 BAR (TONS)	45								

BL (body length)
 Ro (rear overhang)
 Ycog (vert. pos.
 centre of gravity)
 PI(Pivot length)
 $\alpha^\circ = \text{st} \times 60$
 PI

	7000			6800			6600		
BL	200	500	800	200	500	800	200	500	800
Ro	45	47	49	46	48	51	48	50	53
Ycog									
600	49	53	60	50	55	62	51	57	64
900	52	59	67	54	61	70	56	63	74
1200	57	64	75	59	68	80	61	72	83
st	5250	5248	5226	5213	5200	5270	5280	5250	5300