




GHS 175 x 4 x 5860 C

Drawing No :43175458603
Reference No :04-001

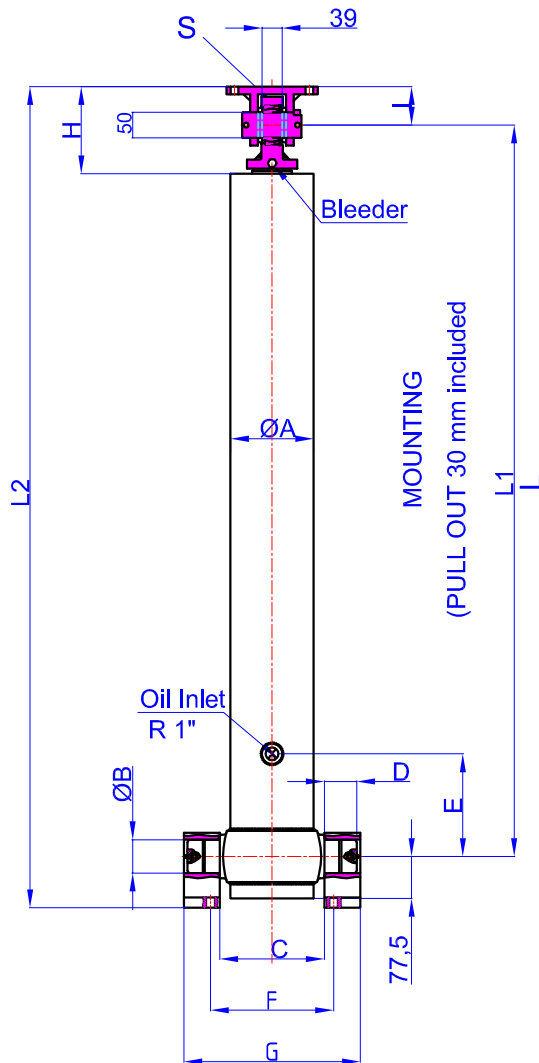

BRACKET KIDS
 60-125-220-50
 47000059-0001



A	:	197	mm
B	:	60	mm
C	:	240	mm
D	:	60	mm
E	:	200	mm
F	:	343	mm
G	:	400	mm
H	:	180	mm
I	:	85	mm
L	:	1780	mm
*L1	:	1810	mm
L2	:	1990	mm
S	:	42	mm

* Inc 30 mm pull out :
 tolerance +20 -0


Hard Chromed all stages

Working Pressure : 135 Bar

Max. Working Pressure : 150 Bar

All Cylinder Materials are St 52 Cold Drawn Tubes

Tipping Weight = Weight Body + Payload



STAGE	1	2	3	4	5	6	7	8	TOTAL
EFFECTIVE DIAMETER (mm)	Ø175	Ø154,5	Ø135	Ø116					
STROKE	1465	1465	1465	1465					5860
OIL DISPLACEMENT (L)	37	29,5	22,5	17					120,5
135 BAR (TONS)	45								

BL (body length)	7500	7300	7100
Ro (rear overhang)	200 500 800	200 500 800	200 500 800
Ycog (vert. pos. centre of gravity)	45 47 49	46 48 50	47 50 52
PI(Pivot length)	49 53 58	50 55 60	51 56 62
	52 58 64	53 59 67	55 61 70
	56 62 72	58 65 75	60 69 80
α° = st x 60 / PI	5625 5640 5635	5596 5600 5583	5561 5666 5633

Weight : 275 Kg