




GHS 175 x 4 x 6580 C

Product Code :43175465803
Reference No : 04-001

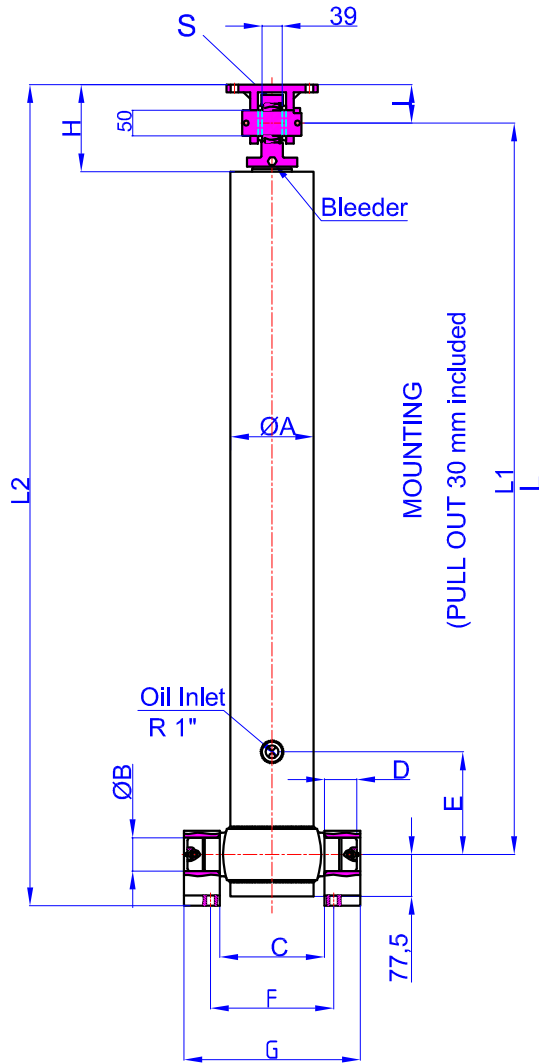

GHCB 60-125-220



A	:	197	mm
B	:	60	mm
C	:	240	mm
D	:	60	mm
E	:	200	mm
F	:	343	mm
G	:	380	mm
H	:	180	mm
I	:	85	mm
L	:	1980	mm
*L1	:	2010	mm
L2	:	2190	mm
S	:	42	mm

* Inc 30 mm pull out :
tolerance +20 -0


Hard Chromed all stages

Working Pressure : 170 Bar

Max. Working Pressure : 190- Bar

All Cylinder Materials are St 52 Cold Drawn Tubes

Tipping Weight = Weight Body + Payload



STAGE	1	2	3	4	5	6	7	8	TOTAL
EFFECTIVE DIAMETER (mm)	Ø175	Ø154,5	Ø135	Ø116					
STROKE	1645	1645	1645	1645					6580
OIL DISPLACEMENT (L)	41,5	33	25	19					118,5
THRUST AT 170 BAR (TONS)	40	31	24	18					

BL (body length)

Ro (rear overhang)

Ycog (vert. pos.
centre of gravity)

PI(Pivot length)

$\alpha^\circ = \text{st} \times 60$
PI

	8400			8200			8000		
BL	200	500	800	200	500	800	200	500	800
Ro	45	47	49	46	48	50	47	49	51
Ycog									
600	48	51	56	49	52	57	49	53	69
900	51	55	60	52	57	62	53	58	64
1200	54	59	66	56	61	69	57	63	72
st	6300	6345	6370	6286	6320	6333	6266	6288	6290