



GHS 175 x 5 x 5750 C

Product Code


:43175557503

Reference No

:04-001

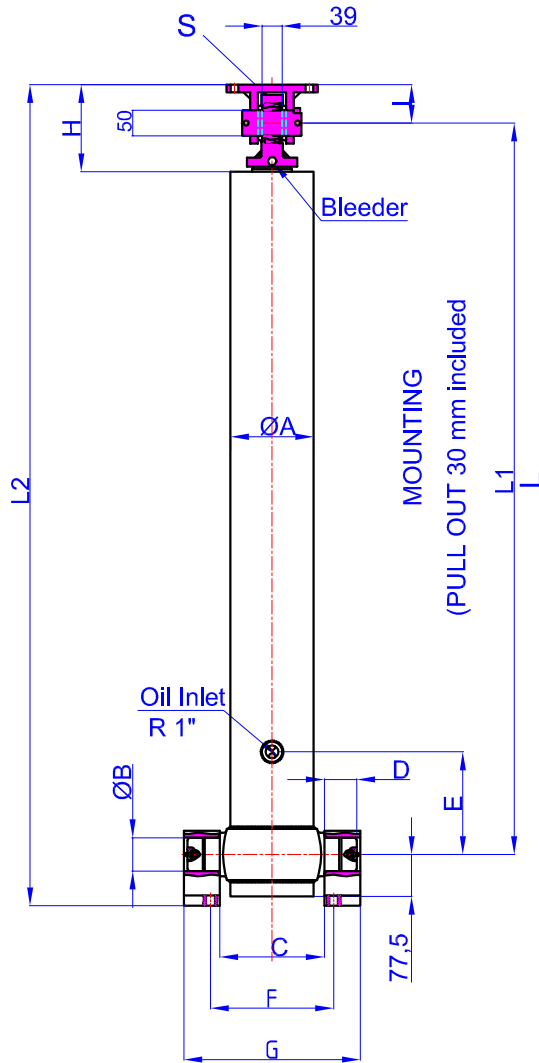

BRACKET KIDS
 GHCB 60-125-220-50
 47000059-0001



A	:	197	mm
B	:	60	mm
C	:	240	mm
D	:	60	mm
E	:	200	mm
F	:	343	mm
G	:	400	mm
H	:	180	mm
I	:	85	mm
L	:	1430	mm
*L1	:	1460	mm
L2	:	1640	mm
S	:	42	mm

* Inc 30 mm pull out :
 tolerance +20 -0

Hard Chromed all stages


Working Pressure : 135 Bar

Max. Working Pressure : 150 Bar

All Cylinder Materials are St 52 Cold Drawn Tubes

Tipping Weight = Weight Body + Payload

STAGE	1	2	3	4	5	6	7	8	TOTAL
EFFECTIVE DIAMETER (mm)	Ø175	Ø154,5	Ø135	Ø116	Ø98				
STROKE	1150	1150	1150	1150	1150				5750
OIL DISPLACEMENT (L)	29	23	18	13	9,5				100
135 BAR (TONS)	45								



BL (body length)
 Ro (rear overhang)
 Ycog (vert. pos.
 centre of gravity)
 PI(Pivot length)
 $\alpha^\circ = \text{st} \times 60$
 PI

	7300			7100			6900		
BL	200	500	800	200	500	800	200	500	800
Ro	45	47	49	46	49	51	47	50	53
Ycog									
600	35	38	42	36	39	44	37	40	46
900	38	42	48	39	43	50	40	46	53
1200	41	47	54	42	49	58	44	52	63
st	5475	5483	5471	5443	5553	5525	5405	5500	5565