



GHS 197 x 5 x 8675 C


Product Code :43197586753
Reference No :04-001

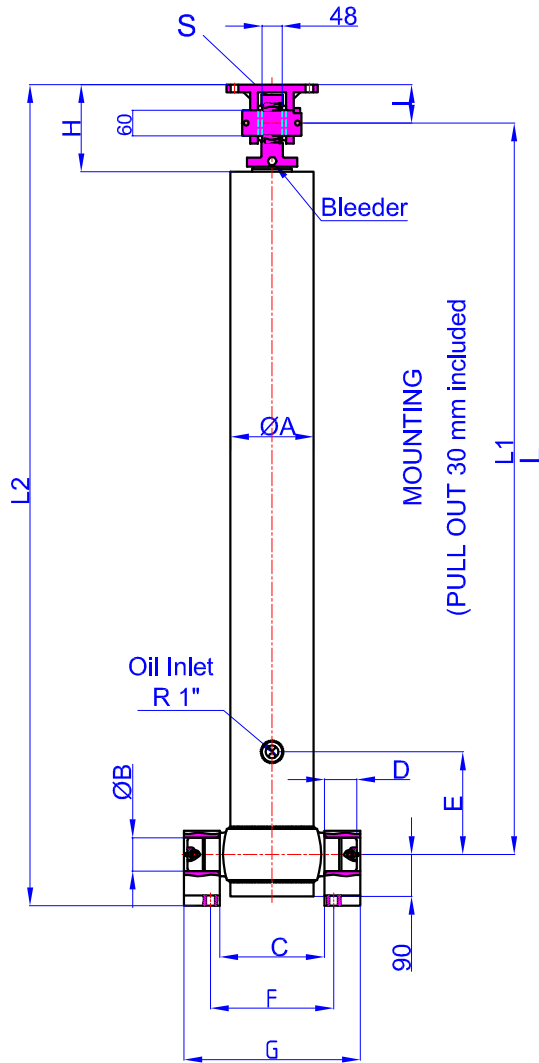

GHTC 60-90
 47000035-02-001



BRACKET KIDS
 65-150-220-38
 47000055-0001



A	:	220	mm
B	:	65	mm
C	:	265	mm
D	:	60	mm
E	:	200	mm
F	:	343	mm
G	:	425	mm
H	:	185	mm
I	:	90	mm
L	:	2070	mm
*L1	:	2100	mm
L2	:	2310	mm
S	:	52	mm

* Inc 30 mm pull out :
 tolerance +20 -0

Hard Chromed all stages


Working Pressure : 135 Bar

Max. Working Pressure : 150 Bar

All Cylinder Materials are St 52 Cold Drawn Tubes

Tipping Weight = Weight Body + Payload

STAGE	1	2	3	4	5	6	7	8	TOTAL
EFFECTIVE DIAMETER (mm)	Ø197	Ø175	Ø154,5	Ø135	Ø116				
STROKE	1735	1735	1735	1735	1735				8675
OIL DISPLACEMENT (L)	55,5	44	35	26,5	20				198
135 BAR (TONS)									60 T



BL (body length)
 Ro (rear overhang)
 Ycog (vert. pos.
 centre of gravity)
 PI(Pivot length)
 $\alpha^\circ = \frac{st \times 60}{PI}$

	11200			11000			10800		
BL	200	500	800	200	500	800	200	500	800
Ro	45	46	47	45	47	48	46	48	49
Ycog	47	49	52	48	50	53	48	51	54
600	47	49	52	48	50	53	48	51	54
900	49	52	55	50	53	57	51	54	58
1200	52	55	59	52	56	60	53	57	62
st	8400	8356	8303	8250	8381	8320	8280	8400	8330