


GHS 135 x 3 x 3720 C

Product Code


:43135337203

Reference No


:04-001

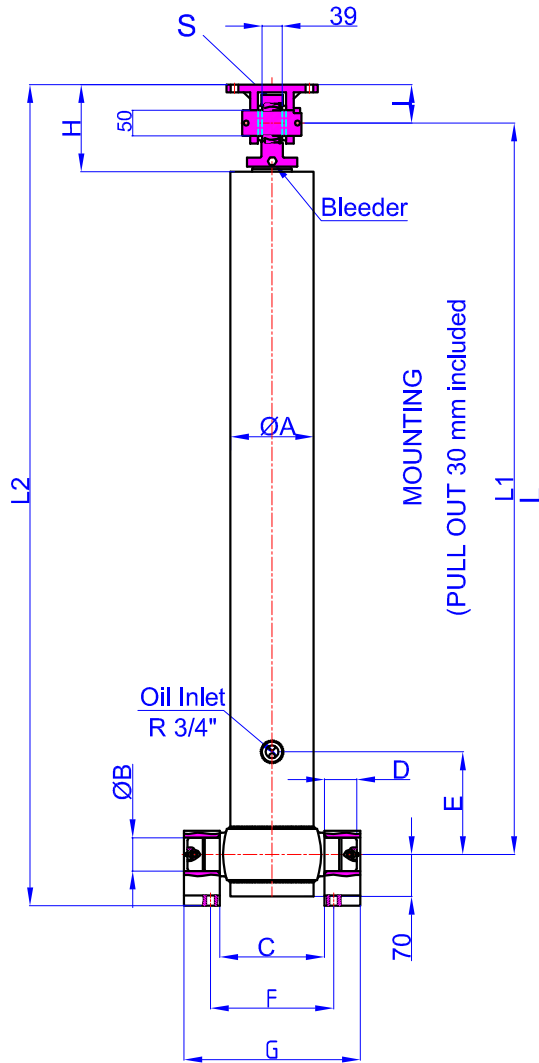

47000020-02-001
(Bracket Kits Top Clevis
GHTC GE 50x75)



47000057-0001
(Bracket Kits T
60-100-150-22)



A	:	156	mm
B	:	60	mm
C	:	193	mm
D	:	60	mm
E	:	200	mm
F	:	240	mm
G	:	333	mm
H	:	170	mm
I	:	75	mm
L	:	1538	mm
*L1	:	1568	mm
L2	:	1713	mm
S	:	42	mm

* Inc 30 mm pull out :
tolerance +20 -0


Hard Chromed all stages

Working Pressure : 135 Bar

Max. Working Pressure : 150 Bar

All Cylinder Materials are St 52 Cold Drawn Tubes

Tipping Weight = Weight Body + Payload



STAGE	1	2	3	4	5	6	7	8	TOTAL
EFFECTIVE DIAMETER (mm)	Ø135	Ø116	Ø98						
STROKE	1240	1240	1240						3720
OIL DISPLACEMENT (L)	19	14	10,5						52
135 BAR (TONS)									24 T

BL (body length)
Ro (rear overhang)
Ycog (vert. pos.
centre of gravity)
PI(Pivot length)
 $\alpha^\circ = \frac{\text{st} \times 60}{\text{PI}}$

	4700	4600	4500
BL	200	400	600
Ro	45	47	50
α°	46	49	51
Ycog	47	50	53
400	33	36	39
700	33	36	40
1000	33	36	41
st	3525	3525	3583
	3526	3593	3570
	3525	3583	3621